

Pendant  
Lighting  
Catalogue  
2017



[Led-lights.ie](http://Led-lights.ie)

Email: [L.E.D.lightechltd@gmail.com](mailto:L.E.D.lightechltd@gmail.com)

Phone: 00 353 (0)45 529020



## *Light is like a diamond. It needs a perfect setting*

LED Lightech Ltd is a fully owned Irish company based in Monasterevin Co Kildare. For over 35 years we have been installing beautiful lighting for many different projects from simple lamp replacements to DMX and DALI controlled lighting systems. Our skilled personnel work closely with our customers from concept stage to project completion. We work with designers, specifiers and contractors in creating effective and attractive lighting concepts.

The products we sell are of the highest standard and all are fully certified to meet regulations and standards such as TÜV, RoHS, CE, UL GS. To achieve the highest quality and reliability we use only recognised quality components such as CREE, Bridgelux, Osram, Philips and Epistar chips, and Tridonic, Philips, Osram, Samsung, Meanwell and other major quality leading brands of drivers. All our products have between 25000 and up to 100000 hours working life and are fully guaranteed for up to 5 years.




















We cater for all requirements with our extensive range of LED products from our standard and designer range which you will find in our catalogue attached or visit our web site [WWW.LED-LIGHTS.IE](http://WWW.LED-LIGHTS.IE). We offer once off special fittings and lights to your requirements. By working closely with major lighting suppliers and designers in Europe everything is possible from unique designs, product quality, on time delivery and price competitive.

Grants up to 30% of outlay on retrofit and new builds by installing LED are available subject to a certain criteria, we offer a free service assisting you in obtaining these grants and helping you to permanently reduce your electricity costs, call us for more information.

Albert Crowley,  
Managing Director  
L.E.D.Lightech Ltd



PH 00 353 (0)45 529020  
FAX 00 353 (0)45 529028  
[WWW.LED-LIGHTS.IE](http://WWW.LED-LIGHTS.IE)

# CONTENTS

	LED II LT-072	01/02	LED II LT-080	03/04	LED II LT-069	05/06	LED II LT-067	07/08	
PMMA									
LED II LT-039A	09/10	LED II LT-039B	09/10	LED II LT-076	11/12	LED II LT-047	11/12	LED II LT-084	13/14
									
LED II LT-034	13/14								
									
	LED LT-064	15/16	LED LT-065	17/18	LED LT-066	17/18	LED LT-068B	19/20	
PC									
LED LT-063B	21/22	LED LT-060A	23/24	LED LT-060B	25/26	LED LT-062A	27/28	LED LT-062B	29/30
									




PENDANT

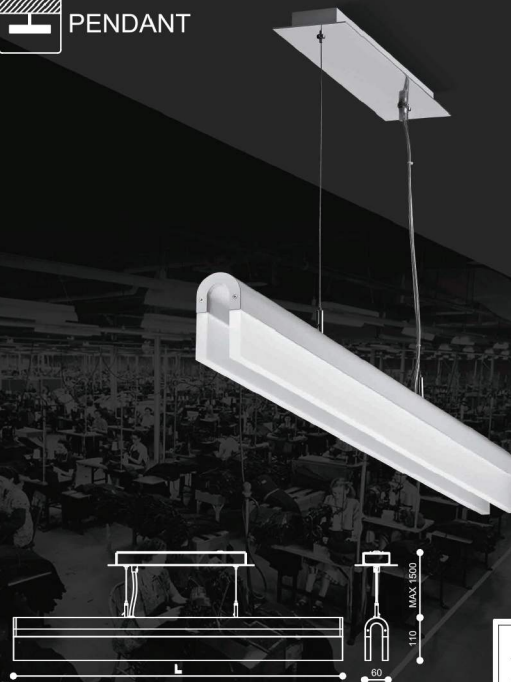

## LT-072

LED-SMD 2835 110V-280V~ 50Hz-60Hz

Model	Qty	CRI	Dimension(mm)	Driver	Material			Lumen	Colour temperature	Power factor	Operating time	IP
					Housing	Diffuser	End cap					
LED-072-900-21.6W	108	≥83	936X60X110	external	ALUM	PMMA	Die-cast ALUM	1678	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-072-1200-28.8W	144	≥83	1226X60X110	external	ALUM	PMMA	Die-cast ALUM	2219	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-072-1500-36W	180	≥83	1536X60X110	external	ALUM	PMMA	Die-cast ALUM	2797	3000K/4000K/6000K	≥0.85	50000(h)	20



LT-080





LED-SMD 2835 110V-260V~ 50Hz-60Hz

Model	LED Qty	CRJ	Dimension(mm)	Driver	Housing	Diffuser	Material	End cap	Lumen	Colour temperature	Power factor	Operating time	IP
LED-080-900-21.6W	108	≥83	936X150X89	inside	ALUM	PMMA	Die-cast ALUM		1793	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-080-1200-28.8W	144	≥83	1226X150X89	inside	ALUM	PMMA	Die-cast ALUM		2371	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-080-1500-36W	180	≥83	1536X150X89	inside	ALUM	PMMA	Die-cast ALUM		2989	3000K/4000K/6000K	≥0.95	50000(h)	20



PENDANT





LT-069

LED-SMD 2835 110V-260V~ 50Hz-60Hz

Model	LED Qty	CRI	Dimension(mm)	Driver	Material			Lumen	Colour temperature	Power factor	Operating time	IP
					Housing	Diffuser	End cap					
LED-069-1200-28.8W	144	≥83	1014X130X18	external	ALUM	PMMA	Die-cast ALUM	2117	3000K/4000K/6000K	≥0.95	50000(h)	20



PENDANT

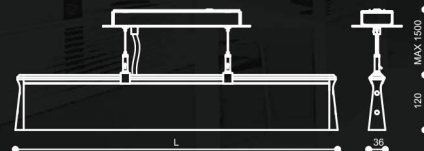

LT-067


LED SMD 2835 110V-260V~ 50Hz-60Hz

Model	LED Qty	CRI	Dimension(mm)	Driver	Material			Lumen	Colour temperature	Power factor	Operating time	IP
					Housing	Diffuser	End cap					
LED-067-900-21.6W	108	≥83	940X36X120	inside	ALUM	PC,PMMA	Die-cast ALUM	994	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-067-1200-28.8W	144	≥83	1236X36X120	inside	ALUM	PC,PMMA	Die-cast ALUM	1314	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-067-1500-36W	180	≥83	1546X36X120	inside	ALUM	PC,PMMA	Die-cast ALUM	1656	3000K/4000K/6000K	≥0.95	50000(h)	20





## PENDANT




## LT-039A

LED SMD 2835 110V-260V~ 50Hz-60Hz

Model	LED Qty	CRI	Dimension(mm)	Driver	Housing	Material	End cap	Lumen	Colour temperature	Power factor	Operating time	IP
LED-039A-900-10.8W	54	≥83	914X15X88	external	ALUM	PMMA	ALUM	1200	3000K/4000K/6000K	≥0.90	50000(h)	20
LED-039A-1200-14.4W	72	≥83	1204X15X88	external	ALUM	PMMA	ALUM	1600	3000K/4000K/6000K	≥0.90	50000(h)	20
LED-039A-1500-18W	90	≥83	1514X15X88	external	ALUM	PMMA	ALUM	1900	3000K/4000K/6000K	≥0.95	50000(h)	20



## PENDANT





## LT-039B

LED SMD 2835 110V-260V~ 50Hz-60Hz

Model	LED Qty	CRI	Dimension(mm)	Driver	Housing	Material	End cap	Lumen	Colour temperature	Power factor	Operating time	IP
LED-039B-900-10.8W	54	≥83	914X15X91	external	ALUM	PMMA	ALUM	1200	3000K/4000K/6000K	≥0.90	50000(h)	20
LED-039B-1200-14.4W	72	≥83	1204X15X91	external	ALUM	PMMA	ALUM	1600	3000K/4000K/6000K	≥0.90	50000(h)	20
LED-039B-1500-18W	90	≥83	1514X15X91	external	ALUM	PMMA	ALUM	1900	3000K/4000K/6000K	≥0.95	50000(h)	20



PENDANT

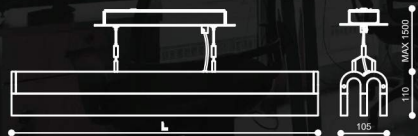



LT-076

LED-SMD 2835 110V-260V~ 50Hz-60Hz

Model	LED Qty	CRI	Dimension(mm)	Driver	Housing	Diffuser	End cap	Lumen	Colour temperature	Power factor	Operating time	IP
LED-076-900-32.4W	162	≥83	936X105X110	external	ALUM	PMMA	Die-cast ALUM	2300	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-076-1200-43.2W	216	≥83	1226X105X110	external	ALUM	PMMA	Die-cast ALUM	3041	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-076-1500-54W	270	≥83	1536X105X110	external	ALUM	PMMA	Die-cast ALUM	3833	3000K/4000K/6000K	≥0.95	50000(h)	20



PENDANT



LT-047

LED-SMD 2835 110V-260V~ 50Hz-60Hz

Model	LED Qty	CRI	Dimension(mm)	Driver	Housing	Diffuser	End cap	Lumen	Colour temperature	Power factor	Operating time	IP
LED-047-900-21.6W	108	≥83	914X170X15	external	ALUM	PMMA	ALUM	1678	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-047-1200-28.8W	144	≥83	1204X170X15	external	ALUM	PMMA	ALUM	2219	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-047-1500-36W	180	≥83	1514X170X15	external	ALUM	PMMA	ALUM	2797	3000K/4000K/6000K	≥0.95	50000(h)	20







PENDANT



CEILING MOUNTING



LINKABLE

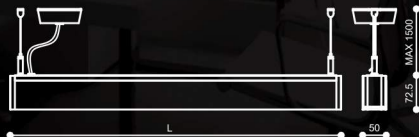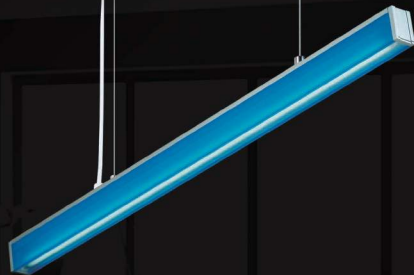

## LT-084

LED SMD 2835 110V-260V~ 50Hz-60Hz

Model	LED Qty	CRI	Dimension(mm)	Driver	Housing	Material	End cap	Lumen	Colour temperature	Power factor	Operating time	IP
LED-084-900-10.8W	54	≥83	930X50X72.5	inside	ALUM	PC,PMMA	ABS	727	3000K/4000K/6000K	≥0.90	50000(h)	20
LED-084-1200-14.4W	72	≥83	1220X50X72.5	inside	ALUM	PC,PMMA	ABS	970	3000K/4000K/6000K	≥0.90	50000(h)	20
LED-084-1500-18W	90	≥83	1530X50X72.5	inside	ALUM	PC,PMMA	ABS	1212	3000K/4000K/6000K	≥0.95	50000(h)	20





PENDANT



CEILING MOUNTING



LINKABLE





## LT-034

LED SMD 2835 110V-260V~ 50Hz-60Hz

Model	LED Qty	CRI	Dimension(mm)	Driver	Housing	Material	End cap	Lumen	Colour temperature	Power factor	Operating time	IP
LED-034-900-10.8W	≥54	83	932X35X76	inside	ALUM	PC,PMMA	ABS	1200	3000K/4000K/6000K	≥0.90	50000(h)	20
LED-034-1200-14.4W	≥72	83	1222X35X76	inside	ALUM	PC,PMMA	ABS	1600	3000K/4000K/6000K	≥0.90	50000(h)	20
LED-034-1500-18W	≥90	83	1522X35X76	inside	ALUM	PC,PMMA	ABS	1900	3000K/4000K/6000K	≥0.95	50000(h)	20

-  PENDANT
-  CEILING MOUNTING
-  LINKABLE

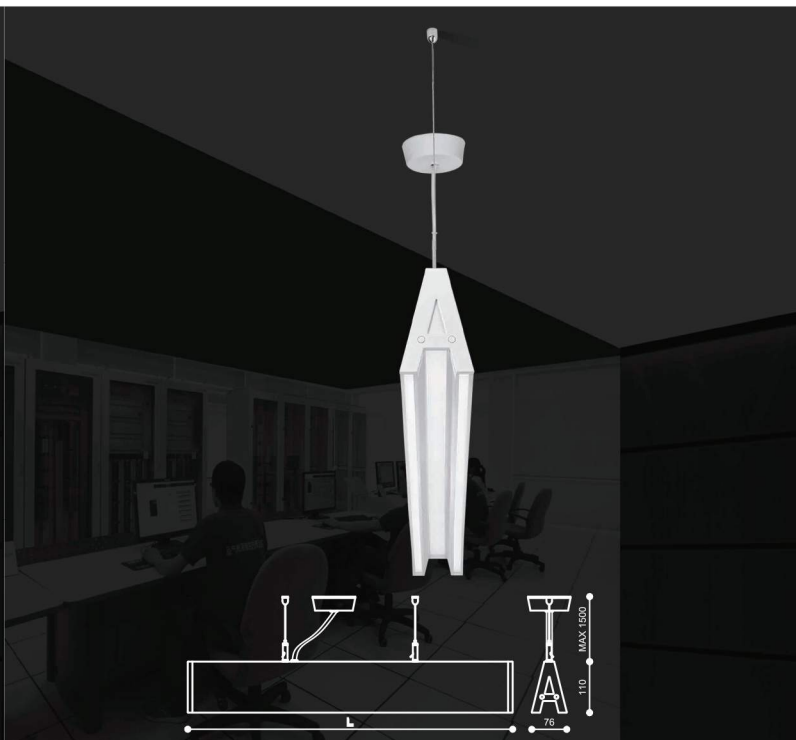



LT-064

LED-SMD 2835 110V-260V~ 50Hz-60Hz

Model	LED		Driver	Material			Lumen	Colour temperature	Power factor	Operating time	IP
	Qty	Dimension(mm)		Housing	Diffuser	End cap					
LED-064-900-32.4W	162	≥83 930X76X110	inside	ALUM	PC	Die-cast ALUM	1163	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-064-1200-43.2W	216	≥83 1220X76X110	inside	ALUM	PC	Die-cast ALUM	1538	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-064-1500-54W	270	≥83 1530X76X110	inside	ALUM	PC	Die-cast ALUM	1939	3000K/4000K/6000K	≥0.95	50000(h)	20



PENDANT





LT-065

LED-SMD 2835 110V-260V~ 50Hz-60Hz

Model	LED Qty	CRI	Dimension(mm)	Driver	Housing	Material	End cap	Lumen	Colour temperature	Power factor	Operating time	IP
LED-065-900-21.6W	108	≥83	930X54X80	external	ALUM	PC	Die-cast ALUM	887	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-065-1200-28.8W	144	≥83	1220X54X80	external	ALUM	PC	Die-cast ALUM	1173	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-065-1500-36W	180	≥83	1530X54X80	external	ALUM	PC	Die-cast ALUM	1479	3000K/4000K/6000K	≥0.95	50000(h)	20



PENDANT





LT066

LED-SMD 2835 110V-260V~ 50Hz-60Hz

Model	LED Qty	CRI	Dimension(mm)	Driver	Housing	Material	End cap	Lumen	Colour temperature	Power factor	Operating time	IP
LED-066-900-21.6W	108	≥83	930X100X55	external	ALUM	PC	Die-cast ALUM	855	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-066-1200-28.8W	144	≥83	1220X100X55	external	ALUM	PC	Die-cast ALUM	1131	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-066-1500-36W	180	≥83	1530X100X55	external	ALUM	PC	Die-cast ALUM	1426	3000K/4000K/6000K	≥0.95	50000(h)	20



# PENDANT





LED SMD 2835 110V-265V~ 50Hz-60Hz

Model	LED Qty	CRI	Dimension(mm)	Driver	Housing	Material	End cap	Lumen	Colour temperature	Power factor	Operating time	IP
LED-061B-900-21.6W	108	≥83	966X83X31	external	ALUM	PC	Die-cast ALUM	1928	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-061B-1200-28.8W	144	≥83	1256X83X31	external	ALUM	PC	Die-cast ALUM	2549	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-061B-1500-36W	180	≥83	1566X83X31	external	ALUM	PC	Die-cast ALUM	3213	3000K/4000K/6000K	≥0.95	50000(h)	20

LT-061B



PENDANT





LED: SMD 2835 110V-260V~ 50Hz-60Hz

Model	LED		Dimension(mm)	Driver	Material			Lumen	Colour temperature	Power factor	Operating time	IP
	Qty	CRI			Housing	Diffuser	End cap					
LED-063B-900-21.6W	108	≥83	924X83X31	external	ALUM	PC	Die-cast ALUM	1528	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-063B-1200-28.8W	144	≥83	1214X83X31	external	ALUM	PC	Die-cast ALUM	2549	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-063B-1500-36W	180	≥83	1524X83X31	external	ALUM	PC	Die-cast ALUM	3213	3000K/4000K/6000K	≥0.95	50000(h)	20

LT-063B



PENDANT



LT-060A



CEILING MOUNTING





LED-SMD 2835 110V-260V~ 50Hz-60Hz

Model	LED Qty	CRI	Dimension(mm)	Driver	Material			Lumen	Colour temperature	Power factor	Operating time	IP
					Housing	Diffuser	End cap					
LED-060A-900-10.8W	54	≥83	950X55X26	external	ALUM	PC	Die-cast ALUM	1047	3000K/4000K/6000K	≥0.90	50000(h)	20
LED-060A-1200-14.4W	72	≥83	1240X55X26	external	ALUM	PC	Die-cast ALUM	1385	3000K/4000K/6000K	≥0.90	50000(h)	20
LED-060A-1500-18W	90	≥83	1550X55X26	external	ALUM	PC	Die-cast ALUM	1746	3000K/4000K/6000K	≥0.95	50000(h)	20







PENDANT



LED-060B



CEILING MOUNTING




LED-SMD 2835 110V-260V~ 50Hz-60Hz

Model	LED Qty	CRI	Dimension(mm)	Driver	Material			Lumen	Colour temperature	Power factor	Operating time	IP
					Housing	Diffuser	End cap					
LED-060B-900-21.6W	108	≥83	966X68X31	external	ALUM	PC	Die-cast ALUM	1928	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-060B-1200-28.8W	144	≥83	1256X68X31	external	ALUM	PC	Die-cast ALUM	2549	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-060B-1500-36W	180	≥83	1566X68X31	external	ALUM	PC	Die-cast ALUM	3213	3000K/4000K/6000K	≥0.95	50000(h)	20




## PENDANT



LT-062A



## CEILING MOUNTING





LED-SMD 2835 110V-260V~ 50Hz-60Hz

Model	LED Qty	CRI	Dimension(mm)	Driver	Material			Lumen	Colour temperature	Power factor	Operating time	IP
					Housing	Diffuser	End cap					
LED-062A-900-10.8W	54	≥83	924X55X26	external	ALUM	PC	Die-cast ALUM	1047	3000K/4000K/6000K	≥0.90	50000(h)	20
LED-062A-1200-14.4W	72	≥83	1214X55X26	external	ALUM	PC	Die-cast ALUM	1385	3000K/4000K/6000K	≥0.90	50000(h)	20
LED-062A-1500-18W	90	≥83	1524X55X26	external	ALUM	PC	Die-cast ALUM	1748	3000K/4000K/6000K	≥0.95	50000(h)	20




PENDANT



LT-062B



CEILING MOUNTING



LED-SMD 2835 110V-260V~ 50Hz-60Hz

Model	LED Qty	CRI	Dimension(mm)	Driver	Material			Lumen	Colour temperature	Power factor	Operating time	IP
					Housing	Diffuser	End cap					
LED-062B-900-21.6W	108	≥83	924X68X31	external	ALUM	PC	Die-cast ALUM	1928	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-062B-1200-28.8W	144	≥83	1214X68X31	external	ALUM	PC	Die-cast ALUM	2549	3000K/4000K/6000K	≥0.95	50000(h)	20
LED-062B-1500-36W	180	≥83	1524X68X31	external	ALUM	PC	Die-cast ALUM	3213	3000K/4000K/6000K	≥0.95	50000(h)	20



[Led-lights.ie](http://Led-lights.ie)

Email: [L.E.D.lighttechltd@gmail.com](mailto:L.E.D.lighttechltd@gmail.com)

Phone: 00 353 (0)45 529020